

VT888VFM

HD 1080p Motorized VF EXIR
Turret Camera


XXVIDEOTEKNIKA



Key Features

- 2.0 MP
- HD 1080P
- 2.8 12mm Motorized vari focal Lens
- 40m Smart IR, EXIR Technology
- TRUE WDR
- AGC, AWB, BLC, DNR
- 12v DC, 250 mA
- IP66

Dimensions

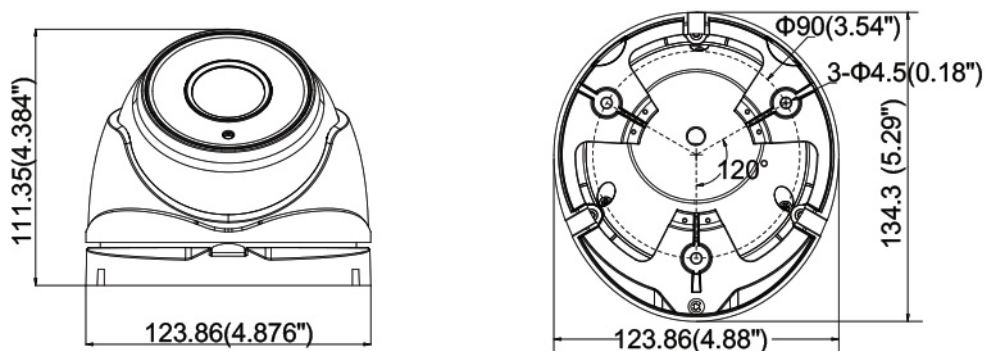

Unit: mm

VT888VFM

HD 1080p Motorized VF EXIR Turret Camera



MODEL	VT888VFM
Image Sensor	2MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1920 (H) × 1088 (V)
Min. illumination	0.01 Lux@(F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25 (1/30) s to 1/50,000 s
Lens	Motorized vari-focal lens, 2.8 to 12 mm Horizontal Field of View : 100° to 35.1°
Lens Mount	φ14
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°; Tilt:0° to 75°; Rotate: 0° to 360°
Synchronization	Internal synchronization
WDR	>120dB
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 HD analog output
S/N Ratio	>62 dB
Menu	
AGC	Support
D/N Mode	Color/BW/SMART
White Balance	ATW/MWB
BLC	Support
Functions	Wide Dynamic Range, Digital noise reduction, Mirror, SMART IR
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC±15%
Power Consumption	Max. 6W
Protection Level	IP66
IR Range	40 m
Communication	Up the coax, Protocol: (TVI output)
Dimensions	134.3 mm × 123.9 mm × 111.4 mm (5.29" × 4.88" × 4.39")
Weight	Approx. 750 g (1.57 lb.)